






Kazan		Длина без боковин	Рабочая температура	Площадь выкладки	Полезный объём
		(мм)	(°C)	(м ²)	(дм ³)
LF 1C	85	200	1250	3,3	868
			1875	4,9	1302
			2500	6,5	1736
			3750	9,8	2604
		216	1250	3,3	935
			1875	4,9	1403
			2500	6,5	1871
			3750	9,8	2806
	95	200	1250	4,0	1066
			1875	6,0	1599
			2500	8,0	2132
			3750	12,0	3198
		216	1250	4,0	1551
			1875	6,0	1726
			2500	8,0	2302
			3750	12,0	3453
	105	200	1250	4,1	1186
			1875	6,2	1778
			2500	8,3	2371
			3750	12,4	3557
		216	1250	4,1	1102
			1875	6,2	1653
			2500	8,3	2204
			3750	12,4	3306
TSC		2159		6,0	1599

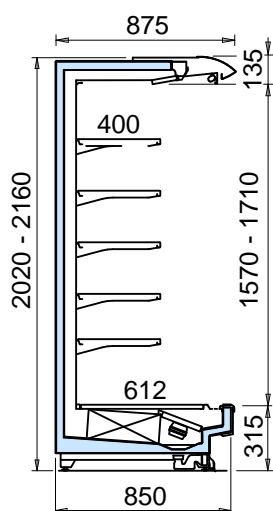

LF 1C 85

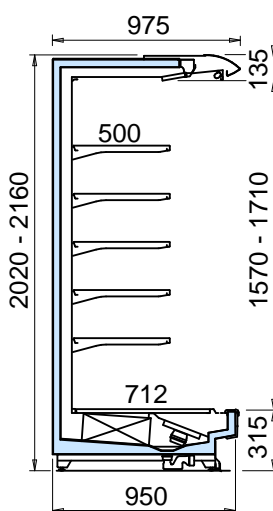

LF 1C 95

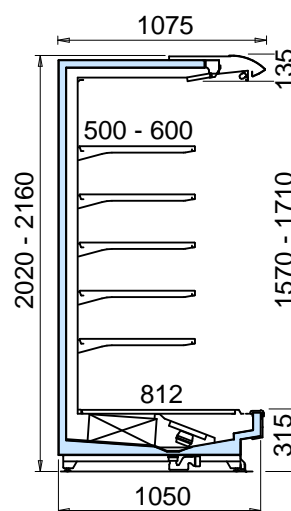

LF 1C 105